



FUTURE SERVICES

info@future-services.net

FLAMMABLE

الاشتعال

JP-8



FUTURE SERVICES

info@future-services.net

FLAMMABLE

الاشتعال

لا تتركه أبداً غير مغلق أو مغطى
DO NOT LEAVE UNLID OR UNCOVERED

21





FLAMMABLE

الاشتعال



FUTURE SERVICES

FLAMMABLE

دبي
DUBAI
الاشتعال
DUBAI

Mercedes-Benz



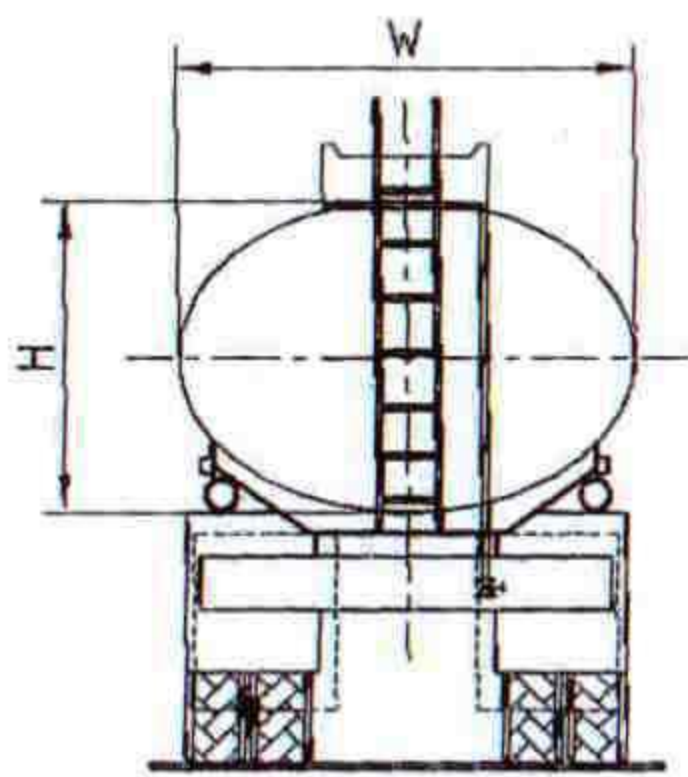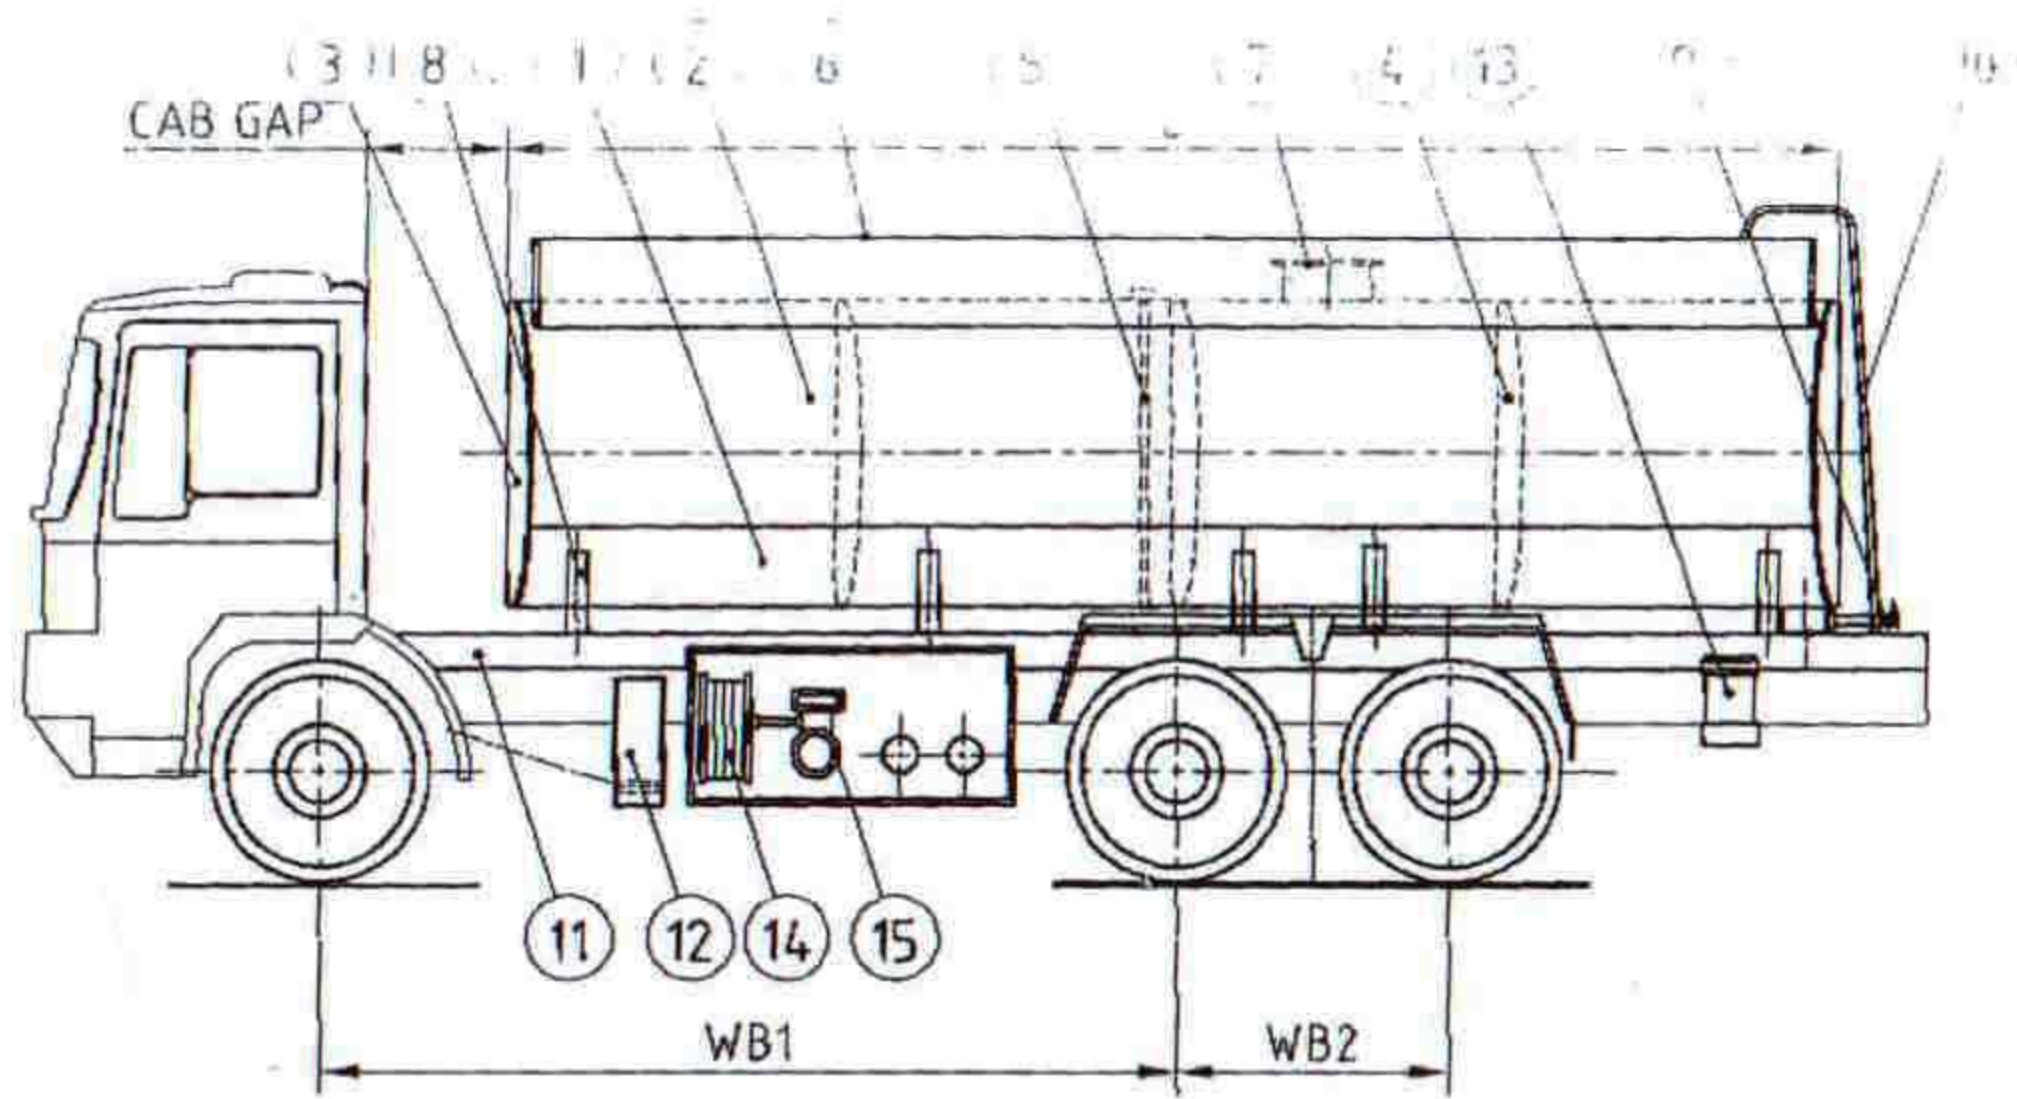



REAR VIEW

**5000 US Gallons + 5% ULLAGE
FUEL TANK ON 6 x 4 CHASSIS**

| | | |
|----|-----------------------|---|
| 15 | FLOW METER (OPTIONAL) | 1 |
| 14 | HOSE REEL (OPTIONAL) | 1 |
| 13 | FIRE EXTINGUISHER | 2 |
| 12 | PTO DRIVEN PUMP | 1 |
| 11 | SUBFRAME HOLLOW SEC. | 1 |
| 10 | LADDER | 1 |
| 9 | GRAVITY DISCHARGE | 1 |
| 8 | SADDLES | 5 |
| 7 | MANWAY | 1 |
| 6 | VALANCE | 1 |
| 5 | DIP TUBE | 1 |
| 4 | BAFFLES | 3 |
| 3 | END COVER | 2 |
| 2 | SIDES | 1 |
| 1 | BELLY | 1 |

| SR. No | DESCRIPTION | OFF |
|--------|-------------|-----|
|--------|-------------|-----|

| | | | | |
|-------|------------|------|-------------|---|
| 0 | 31/05/09 | ARK | LSK |   CAD SCALE N.T.S. |
| INDEX | ALTERATION | DATE | DRAWN APPD. | |

ALL DIMENSIONS IN mm



Future Services
General Trading & Contracting Co.

SPECIFICATION SHEET FOR 5000 US GALLONS FUEL TRUCKS

Fuel Tanker

Tank

| | |
|-------------------|--|
| Shape | : Elliptical. |
| Compartment | : One |
| Construction | : All welded steel to spec JIS-G-3101/SS 400 or equivalent. : Shell and end caps 4 mm thick. : Baffles 3 mm thick. |
| Baffle Plates | : Flanged, opened at top and bottom to facilitate liquid leveling |
| Manhole | : One on top of the tank with PV vent and safety relief. |
| Dipstick | : Dipstick mandrel on top of the tank with non calibrated dipstick. |
| Flushing | : Full length water tight rails with drain pipe at the rear. |
| Catwalk | : Full length of checkered plate. |
| Emergency Valve | : Mechanical bottom emergency valve with bottom operator. |
| Gravity Discharge | : Through 2 ½" valve at the rear fitted with adaptor and dust cover. |
| Pump | : PTO driven fuel pump, having capacity 400/700 liters/min. Vane type pump. Alfons Haar-Germany or equivalent. |

Standard Accessories

Tool-box
Rear-bumper
Mud-guards around rear axle
Mud flaps behind rear wheels
Battery cut off switch in the cabin
Access ladder at the rear left side
Side-light along the body left and right
Hose stowage one at each side of the tank
Hose 2 ½"x4 meters with coupling one set
Two fire extinguisher brackets

Paint

| | |
|----------|---|
| Internal | : Nil |
| External | : One coat of red oxide primer and one coat of synthetic finish paint shade as per customer's choice. |