



UTURE SE

info@future





FUT

TOYOTA

SERVICE

SERVICE

future services

30

739

No.



وزارة النقل
1389

FUTURE SOLUTIONS
info@future

TOYOTA

739

30

4,000 – 5,000 lbs • 1,814 – 2,268 kg • Mast Specifications

8FGCSU20

Mast Type	Maximum Fork Height (top of forks)	Overall Height				Free Lift		Tilt Range		Load Capacity at 600mm/24" Load Center
		Lowered	Extended		Without Load Backrest	With Std. Load Backrest	FWD	BWD		
			Without Load Backrest	With Std. Load Backrest						
in. mm		in. mm	in. mm	in. mm	in. mm	in. mm	deg.	deg.	lbs. kg	
V	80 2032	57.5 1461	101.2 2570	128.3 3259	5.7 145	5.7 145	6	5	4000 1814	
	119.5 3035	77.2 1961	140.6 3571	167.7 4260	5.7 145	5.7 145	6	10	4000 1814	
	131.5 3340	83.1 2111	152.4 3871	179.5 4559	5.7 145	5.7 145	6	10	4000 1814	
	139 3531	87 2210	164.2 4171	187.4 4760	5.7 145	5.7 145	6	10	4000 1814	
	147 3734	93.3 2370	168.1 4270	195.3 4961	5.7 145	5.7 145	6	10	4000 1814	
FV	119.5 3035	77.2 1961	138.8 3526	167.7 4260	56.5 1435	29.2 742	6	10	4000 1814	
	131.5 3340	83.1 2111	150.6 3825	179.5 4559	62.4 1585	35.1 892	6	10	4000 1814	
	139 3531	87 2210	158.5 4026	187.4 4760	66.4 1687	39 991	6	10	4000 1814	
FSV	159 4039	73.2 1859	179.7 4564	207.1 5260	52.8 1341	25.2 640	6	5	4000 1814	
	170.5 4331	77.2 1961	182.7 4641	218.9 5560	56.7 1440	29.2 742	6	5	4000 1814	
	189 4801	83.1 2111	209.4 5319	237.2 6025	62.6 1590	35.1 892	6	5	3750 1701	
	198 5029	87 2210	219.1 5565	246.5 6261	66.5 1689	39 991	6	5	3400 1542	
	218 5537	93.3 2370	238.8 6066	266.1 6759	72.8 1849	45.3 1151	6	5	2400 1089	
	237.5 6033	100.8 2560	258.5 6566	285.8 7259	80.3 2040	52.8 1341	6	5	1650 748	

Note: Height of standard load backrest is 48 in. / 1220 mm

8FGCU20 & 8FGCU25

Mast Type	Maximum Fork Height (top of forks)	Overall Height				Free Lift		8FGCU20				8FGCU25			
		Lowered	Extended		Without Load Backrest	With Std. Load Backrest	Tilt Range		Load Capacity at 600mm/24" Load Center		Tilt Range		Load Capacity at 600mm/24" Load Center		
			Without Load Backrest	With Std. Load Backrest			FWD	BWD	Narrow Tread	Wide Tread	FWD	BWD	Narrow Tread	Wide Tread	
in. mm		in. mm	in. mm	in. mm	in. mm	in. mm	deg.	deg.	lbs. kg	lbs. kg	deg.	deg.	lbs. kg	lbs. kg	
V	80 2032	57.7 1466	104.3 2649	128.3 3259	6.1 155	6.1 155	6	8	4000 1814	4000 1814	6	8	5000 2268	5000 2268	
	119.5 3035	77.4 1966	143.7 3650	167.7 4260	6.1 155	6.1 155	6	10	4000 1814	4000 1814	6	10	5000 2268	5000 2268	
	131.5 3340	83.3 2116	155.5 3950	179.5 4559	6.1 155	6.1 155	6	10	4000 1814	4000 1814	6	10	5000 2268	5000 2268	
	139 3531	87.2 2215	163.4 4150	187.4 4760	6.1 155	6.1 155	6	10	4000 1814	4000 1814	6	10	5000 2268	5000 2268	
	147 3734	93.5 2375	171.3 4351	195.3 4961	6.1 155	6.1 155	6	10	4000 1814	4000 1814	6	10	5000 2268	5000 2268	
FV	119.5 3035	77.4 1966	143.3 3640	167.7 4260	53.5 1359	29.4 747	6	10	4000 1814	4000 1814	6	10	5000 2268	5000 2268	
	131.5 3340	83.3 2116	155.1 3940	179.5 4559	59.4 1509	35.3 897	6	10	4000 1814	4000 1814	6	10	5000 2268	5000 2268	
	139 3531	87.2 2215	163 4140	187.4 4760	63.4 1610	39.2 996	6	10	4000 1814	4000 1814	6	10	5000 2268	5000 2268	
FSV	159 4039	73.4 1864	119.5 3035	207.1 5260	48 1219	25.4 645	6	5	4000 1814	4000 1814	6	5	5000 2268	5000 2268	
	170.5 4331	77.4 1966	194.5 4940	218.9 5560	52 1321	29.4 747	6	5	4000 1814	4000 1814	6	5	5000 2268	5000 2268	
	189 4801	83.3 2116	212.8 5405	237 6020	57.9 1471	35.3 897	6	5	3950 1792	3950 1792	6	5	5000 2268	5000 2268	
	198 5029	87.2 2215	222 5639	246.5 6261	61.8 1570	39.2 996	6	5	3900 1769	3900 1769	6	5	4600 2087	4600 2087	
	218 5537	93.5 2375	241.7 6139	266.1 6759	68.1 1730	45.5 1156	6	5	3550 1610	3800 1724	6	5	3850 1746	4550 2064	
	237.5 6033	101 2565	261.4 6640	285.8 7259	75.6 1920	53 1346	6	5	2800 1270	3350 1520	6	5	2400 1089	3200 1451	
QFV	240 6096	83 2108	261 6629	288 7315	62 1575	35 889	6	5	2500 1134	2900 1315	6	5	2900 1315	3800 1724	
	258 6553	89 2261	279 7087	306 7772	66 1676	39 991	6	5	1750 800	2500 1134	6	5	1950 885	2900 1315	
	276 7010	95 2413	297 7544	324 8230	72 1829	45 1143	6	5	950 450	1850 839	6	5	1300 590	1950 885	

Note: Height of standard load backrest is 48 in. / 1220 mm

6,000 – 6,500 lbs • 2,722 – 2,948 kg • Mast Specifications

8FGCU30

Mast Type	Maximum Fork Height (top of forks)	Overall Height				Free Lift		Tilt Range		Load Capacity at 600mm/24" Load Center	
		Lowered	Extended		Without Load Backrest	With Std. Load Backrest	FWD	BWD	Narrow Tread	Wide Tread	
			Without Load Backrest	With Std. Load Backrest							
in. mm		in. mm	in. mm	in. mm	in. mm	in. mm	deg.	deg.	lbs. kg	lbs. kg	
V	80.5 2045	57.5 1461	106.1 2695	128.5 3264	5.3 135	5.3 135	6	8	6000 2722	6000 2722	
	119.5 3035	77.2 1961	145.5 3696	167.9 4265	5.3 135	5.3 135	6	10	6000 2722	6000 2722	
	131.5 3340	83.1 2111	157.3 3995	179.7 4564	5.3 135	5.3 135	6	10	6000 2722	6000 2722	
	139.5 3543	87 2210	165.2 4196	187.6 4765	5.3 135	5.3 135	6	10	6000 2722	6000 2722	
	147 3734	93.3 2370	173 4394	195.5 4966	5.3 135	5.3 135	6	10	6000 2722	6000 2722	
FV	119.5 3035	77.2 1961	141.7 3599	167.9 4265	53.5 1359	29.2 742	6	10	6000 2722	6000 2722	
	131.5 3340	83.1 2111	153.5 3899	179.7 4564	59.4 1509	35.1 892	6	10	6000 2722	6000 2722	
	139.5 3543	87 2210	161.4 4100	187.6 4765	63.4 1610	39 991	6	10	6000 2722	6000 2722	
FSV	159 4039	77.2 1961	181.1 4600	207.3 5265	55.1 1400	29.2 742	6	5	6000 2722	6000 2722	
	171 4343	83.1 2111	192.9 4900	219.1 5565	61 1549	35.1 892	6	5	6000 2722	6000 2722	
	187 4750	87 2210	208.7 5301	235 5969	65 1651	39 991	6	5	5900 2676	5900 2676	
	198.5 5042	93.3 2370	220.5 5601	246.7 6266	71.3 1811	45.3 1151	6	5	5850 2654	5850 2654	
	218 5537	100.8 2560	240.2 6101	266.3 6764	78.7 1999	52.8 1341	6	5	5300 2404	5600 2540	
	237.5 6033	110.6 2809	259.8 6599	286 7264	88.6 2250	62.6 1590	6	5	4000 1814	5150 2336	
QFV	240 6096	83 2108	261 6629	288 7315	62 1575	35 889	6	5	3850 1746	4450 2018	
	258 6553	89 2261	279 7087	306 7772	66 1676	39 991	6	5	2650 1202	3250 1474	
	276 7010	95 2413	297 7544	324 8230	72 1829	45 1143	6	5	1650 748	1900 862	

Note: Height of standard load backrest is 48 in. / 1220 mm

8FGCU32

Mast Type	Maximum Fork Height (top of forks)	Overall Height				Free Lift		Tilt Range		Load Capacity at 600mm/24" Load Center	
		Lowered	Extended		Without Load Backrest	With Std. Load Backrest	FWD	BWD	Narrow Tread	Wide Tread	
			Without Load Backrest	With Std. Load Backrest							
in. mm		in. mm	in. mm	in. mm	in. mm	in. mm	deg.	deg.	lbs. kg	lbs. kg	
V	80.5 2045	57.5 1461	106.1 2695	128.5 3264	5.3 135	5.3 135	6	8	6500 2948	6500 2948	
	119.5 3035	77.2 1961	145.5 3696	167.9 4265	5.3 135	5.3 135	6	10	6500 2948	6500 2948	
	131.5 3340	83.1 2111	157.3 3995	179.7 4564	5.3 135	5.3 135	6	10	6500 2948	6500 2948	
	139.5 3543	87 2210	165.2 4196	187.6 4765	5.3 135	5.3 135	6	10	6500 2948	6500 2948	
	147 3734	93.3 2370	173 4394	195.5 4966	5.3 135	5.3 135	6	10	6500 2948	6500 2948	
FV	119.5 3035	77.2 1961	146.9 3731	167.9 4265	48.4 1229	29.2 742	6	10	6500 2948	6500 2948	
	131.5 3340	83.1 2111	158.7 4031	179.7 4564	54.3 1379	35.1 892	6	10	6500 2948	6500 2948	
	139.5 3543	87 2210	166.5 4229	187.6 4765	58.3 1481	39 991	6	10	6500 2948	6500 2948	
FSV	159 4039	77.2 1961	186.2 4729	207.3 5265	50 1270	29.2 742	6	5	6500 2948	6500 2948	
	171 4343	83.1 2111	198 5029	219.1 5565	55.9 1420	35.1 892	6	5	6500 2948	6500 2948	
	187 4750	87 2210	213.8 5431	235 5969	59.8 1519	39 991	6	5	6500 2948	6500 2948	
	198.5 5042	93.3 2370	225.6 5730	246.7 6266	66.1 1679	45.3 1151	6	5	6500 2948	6500 2948	
	218 5537	100.8 2560	245.3 6231	266.3 6764	73.6 1869	52.8 1341	6	5	5050 2291	6150 2790	
	237.5 6033	110.6 2809	265 6731	286 7264	83.5 2121	62.6 1590	6	5	3500 1588	4850 2200	
QFV	240 6096	83 2108	261 6629	288 7315	62 1575	35 889	6	5	3750 1701	4200 1905	
	258 6553	89 2261	279 7087	306 7772	66 1676	39 991	6	5	2500 1134	3150 1429	
	276 7010	95 2413	297 7544	324 8230	72 1829	45 1143	6	5	1400 635	1800 816	

Note: Height of standard load backrest is 48 in. / 1220 mm

LIFT TRUCKS



Some product features described herein are optional. Please consult your dealer for specifications. Details and specifications of equipment are based on information available at the time of printing and may change without notice.



ISO 14001



3,000 - 6,500 lbs

1,361 - 2,948 kg

8FGCU CUSHION

3,000 – 6,500 lbs • 1,361 – 2,948 kg • Standard Features

DURABILITY

- Control Area Network (CAN-bus) communication
- Fully-stamped steel side panels
- Moisture resistant electric connectors
- High cooling capacity radiator with fan shroud
- Low maintenance battery
- Large capacity engine cooling fan
- 7" cyclone air cleaner with high positioned external air-intake (6" diameter on 8FGCU15.18.S20)
- Plate iron front fenders
- Anti-restart ignition key switch
- Stamped steel engine hood
- Fully-sealed air-intake system
- Self-adjusting brakes

SAFETY

- System of Active Stability™ (SAS)
- Operator Presense Sensing System (OPSS)
- Bolt-on overhead guard
- Key lowering interlock
- Electric horn
- Neutral engine start safety switch
- Asbestos free components

PERFORMANCE

- 2007 EPA/CARB certified engine with closed loop 3-way catalytic muffler system
- Toyota 136 cu. in., 4-cylinder, OHV gasoline engine (4Y-ECS)
- Electronic fuel injection (gasoline only)
- UL "G" gasoline engine
- One-way automatic fork leveling
- Independent brake & inching pedals
- 2-stage limited free lift mast (V)
- Integrated monitoring system - includes
 - Digital hour meter display
 - Engine coolant temperature gauge
 - Fuel gauge (gasoline only)
 - Check engine light
 - Engine oil pressure warning light
 - Battery charge warning light
 - OPSS activation light
 - SAS/OPSS warning light
- Adjustable headlights with guards
- Foot-activated parking brake
- Alternator with built-in regulator
- Transistorized ignition assembly
- Automatic transmission with oil cooler
- Full floating powertrain
- Hydraulic valve lifters
- Integrated head light and turn signal lever
- Electric shift control

ERGONOMICS

- Dash mounted instrument display
- 11.8" diameter two-spoke steering wheel
- Hydrostatic power steering
- Heavy-duty non-slip rubber floor mat
- 12" long dual operator assist grips
- Cowl-mount hydraulic control levers with rubber boot covers
- Low wide entry steps
- Low profile front cowl
- Non-cinching seat belt
- Dash integrated amenity tray and oversized cup holder
- 4-Way adjustable vinyl full-suspension seat
- Slim profile, tilt steer column

SERVICEABILITY

- Easy access no-tools floorboard
- Engine hood assist damper with lock device
- Air cleaner discharge valve
- Externally mounted hydraulic oil return filter
- Dash mounted brake fluid level check
- Easy lift engine hood with wide 75 degree opening

3,000 – 6,500 lbs • 1,361 – 2,948 kg Optional Equipment

- Travel Speed/Acceleration Control System
- Multifunction digital display with self-diagnostics
- Hydraulic accumulator
- Intelli-Shift
- Wet disc brake system
- Orange seat belt
- Rear assist grip with horn button
- Rust-proof spec
- Mini-lever controls with Ergo-Shift
- Joystick control with Ergo-Shift
- Swivel seat
- Synchronized steering
- High mount rear combination lights
- LED rear combination lights
- Engine protection system
- 12 Volt power supply
- EZ-Pedal foot directional control
- Engine shutdown device
- Plate fin radiator
- Radiator screen
- Fire extinguisher
- Front combination lights
- Steering wheel with knob
- Polished and tapered forks
- Integral and hang-on sideshifters
- Integral sideshifting fork positioner
- Bottler's tilt
- LPG low-fuel warning light and alarm
- High capacity 70 amp alternator with built-in regulator
- Strobe lights
- Step mounted tool box with cover
- Back-up alarms
- 4-Way adjustable cloth full-suspension seat
- Combination brake and inching pedal
- Pre-cleaner for air intake
- Rear-view mirrors
- Wide tread tires
- UL "GS" gasoline model
- 4Y-ECS Hi-Power engine
- Fuel system configurations with swing out tank bracket and one touch latch system
 - UL-LP
 - UL-LPS
 - UL-LP/G dual fuel
 - UL-CNG/G dual fuel
- Swing-down LPG tank bracket
- Tilt cylinder boots

3,000 – 6,500 lbs • 1,361 – 2,948 kg Truck Specifications

Models	8FGCU15	8FGCU18	8FGCSU20	8FGCU20	8FGCU25	8FGCU30	8FGCU32
Load Capacity (at 24" Load Center 600 mm) lbs. kg	3000 1361	3500 1588	4000 1814	4000 1814	5000 2268	6000 2722	6500 2948
Body/Frame Construction	Welded steel body and frame						
Steering Type	Hydrostatic power steering						
Brakes	Hydraulic (foot)						
Transmission	Type	Powershift					
	Speeds (fwd/rev) mph kph	1/1 1.6/1.6					
Toyota Engine	Model	4Y-ECS					
	Type	4 cylinder gasoline					
Piston Displacement	cu. in. cc.	136 2228.5	136 2228.5	136 2228.5	136 2228.5	136 2228.5	136 2228.5
Rated Horsepower - Net rpm	SAE HP kW	48/2250 36/2250	48/2250 36/2250	48/2250 36/2250	51/2570 38.5/2570	51/2570 38.5/2570	51/2570 38.5/2570
Rated Torque - Net rpm	SAE ft-lb. N-m	118/2100 156/2100	118/2100 156/2100	118/2100 156/2100	118/2100 156/2100	118/2100 156/2100	118/2100 156/2100

EXTERIOR DIMENSIONS

Models	8FGCU15	8FGCU18	8FGCSU20	8FGCU20	8FGCU25	8FGCU30	8FGCU32
A Maximum Fork Height (MFH)	in. mm	131.5 3340	131.5 3340	131.5 3340	131.5 3340	131.5 3340	131.5 3340
B Mast Lowered Height	in. mm	83.1 2110.7	83.1 2110.7	83.1 2110.7	83.3 2110.7	83.3 2110.7	83.1 2110.7
C Free Lift	in. mm	5.7 145	5.7 145	5.9 149	6.1 155	6.1 155	5.3 134.6
D Load Distance*	in. mm	15.7 399	15.7 399	16.3 414	16.7 424	16.7 424	17.7 450
E Wheelbase	in. mm	48.2 1224	48.2 1224	48.2 1224	58.5	58.5	58.5
F Fork Size (TxWxL)	in. mm	1.4x4x42 36x101.6x1066.8	1.4x4x42 36x101.6x1066.8	1.6x5x42 41x127x1066.8	1.6x5x42 41x127x1066.8	1.6x5x42 41x127x1066.8	1.8x5x42 46x127x1066.8
G Length to Fork Face	in. mm	82.3 2090	84.6 2149	86.4 2195	91.2 2316.5	93.7 2380.0	97.4 2474
H Overhead Guard Height	in. mm	80.1 2035	80.1 2035	80.1 2035	80.7 2050	80.7 2050	80.7 2050
I Tilt Range (Fwd/Bwd)	deg	6/10	6/10	6/10	6/10	6/10	6/10
J Outside Turning Radius	in. mm	67.5 1714.5	70 1778.0	71.3 1811	75.6 1920	77.6 1971	80 2032
K Basic Rt Angle Stacking Aisle Width**	in. mm	83.5 2121	86 2184.4	87.6 2225.0	92.3 2344	94.3 2395	97.5 2477
L Overall Width	in. mm	37.2 945	37.2 945	37.2 945	41.9 1064.3	41.9 1064.3	43.7 1110
M Carriage Width	in. mm	32 813	32 813	32 813	36 914	36 914	38 965
N Std Tread Width (Front/Rear)	in. mm	31.3/32.3 795/820.4	31.3/32.3 795/820.4	31.3/32.3 795/820.4	35.0/36.0 889/914	35.0/36.0 889/914	35.8/36.0 909/914
Underclearance	Minimum w/ load	in. mm	2.8 71.1	3.0 76	3.0 76	2.9 73.7	2.8 71.1
	Center of W.B.	in. mm	4.3 109	4.3 109	4.3 109	4.3 109	4.3 109

PERFORMANCE DATA

Maximum Travel Speed	Full Load	Reverse	mph km/h	10.9 17.5	10.9 17.5	10.9 17.5	10.6 17.1	10.6 17.1	10.6 17.1	10.6 17.1	10.6 17.1
				10.9 17.5	10.9 17.5	10.9 17.5	10.6 17.1	10.6 17.1	10.6 17.1	10.6 17.1	
Lifting Speeds (V mast)	Full Load	No Load	fpm mm/sec	110 559	110 559	110 559	124 630	124 630	102 518	102 518	102 518
				114 579	114 579	114 579	127 645	127 645	108 549	108 549	
Lowering Speeds (V mast)	Full Load	No Load	fpm mm/sec	98 498	98 498	98 498	98 498	98 498	98 498	98 498	98 498
				108 549	108 549	108 549	98 498	98 498	98 498	98 498	
Maximum Drawbar Pull	Full Load	No Load	lbs / N	3750 16680.8	3750 16680.8	3750 16680.8	4200 18682.5	4200 18682.5	4200 18682.5	4200 18682.5	4200 18682.5
				1550 6894.7	1450 6449.9	1450 6449.9	1850 8229.2	1750 7784.4	1750 7784.4	1750 7784.4	
Maximum Gradeability	Full Load	No Load	%	43	40	35	36	31	25	25	25
				20	18	18	21	17	16	16	

TRUCK WEIGHTS

Weight Distribution	Full Load	Front	Rear	lb kg	Gross Weight (empty)														
					lb kg	5890 2672		6410 2907.5		6900 3129.8		7130 3234.1		8000 3628.7		9300 4218.4		9700 4399.9	
						7810 3543	8560 3882.8	9575 4343.2	9810 4449.7	11310 5130.1	13340 6050.9	14080 6386.6							
No Load	Front	lb kg	2340 1061	2180 988.8	2200 997.9	3020 1369.9	2820 1279.1	3070 1392.5	2950 1338.1										
	Rear	lb kg	3550 1610	4230 1918.7	4700 2131.9	4110 1864.3	5180 2349.6	6230 2825.9	6750 3061.8										

FUEL CAPACITY

Gasoline Fuel Tank	IM gal	Litre	5.9 26.9	5.9 26.9	5.9 26.9	9.9 45	9.9 45	9.9 45	9.9 45
--------------------	--------	--------------	-----------------	-----------------	-----------------	---------------	---------------	---------------	---------------

ATTACHMENT

Auxiliary Function Pressure Relief	psi Mpa	2275 15.6	2275 15.6	2275 15.6	2275 15.6	2275 15.6	2275 15.6	2275 15.6	2275 15.6
Auxiliary Function Flow Rate (max)	gpm CFS	16 0.035	16 0.035	16 0.035	20 0.044	20 0.044	20 0.044	20 0.044	20 0.044


TIRES

Type (front/rear)	Cushion/Cushion								
Size	Drive (Front)	Steer (Rear)	18x6x12-1/8		14x5x10		21x7x15		21x8x15
			14x4-1/2x8		14x5x10		16x5x10-1/2		16x6x10-1/2

* Centerline of front axle to front face of forks

** Add load length and clearance

3,000 – 6,500 lbs • 1,361 – 2,948 kg Truck Dimensions

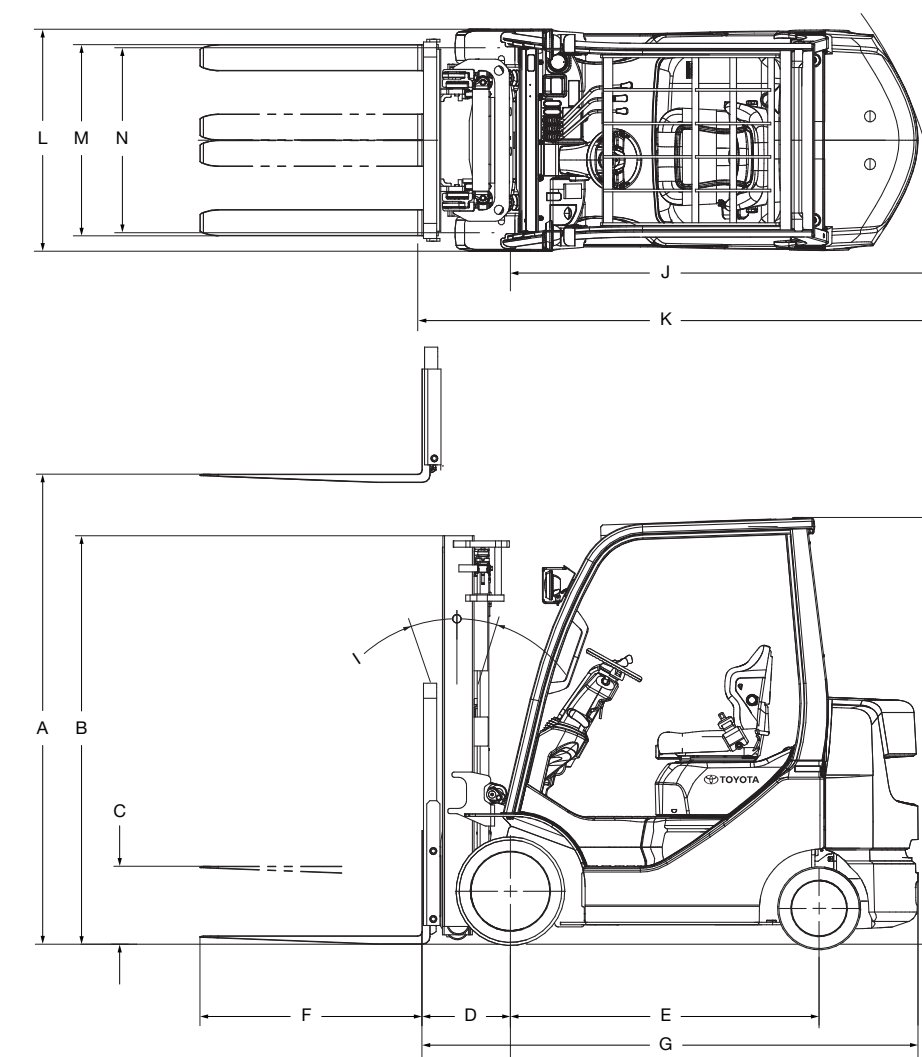

8FGCU25 model shown above

3,000 – 3,500 lbs • 1,361 – 1,588 kg Mast Specifications

8FGCU15 & 8FGCU18

Mast Type	Maximum Fork Height (top of forks)	Overall Height				Free Lift		8FGCU15				8FGCU18	
		Lowered	Extended		Without Load Backrest	With Std. Load Backrest	Tilt Range		Load Capacity at 600mm/24"		Tilt Range		Load Capacity at 600mm/24" Load Center
			Without Load Backrest	With Std. Load Backrest			FWD	BWD	Narrow Tread	Wide Tread	FWD	BWD	
		deg	deg	lbs. kg	lbs. kg	deg	deg	lbs. kg					
V	80 2032	57.5 1461	101.2 2570	126.8 3221	5.7 145	5.7 145	6	5	3000 1361	3000 1361	6	5	3500 1588
	119 3023	77.2 1961	140.6 3571	167.5 4255	5.7 145	5.7 145	6	10	3000 1361	3000 1361	6	10	3500 1588
	131 3327	83.1 2111	152.4 3871	179.3 4554	5.7 145	5.7 145	6	10	3000 1361	3000 1361	6	10	3500 1588
	139 3531	87 2210	164.2 4171	187.2 4755	5.7 145	5.7 145	6	10	3000 1361	3000 1361	6	10	3500 1588
	147 3734	93.3 2370	168.1 4270	195.1 4956	5.7 145	5.7 145	6	10	3000 1361	3000 1361	6	10	3500 1588
FV	119 3023	77.2 1961	138.8 3526	167.5 4255	56.5 1435	29.2 742	6	10	3000 1361	3000 1361	6	10	3500 1588
	131 3327	83.1 2111	150.6 3825	179.3 4554	62.4 1585	35.1 892	6	10	3000 1361	3000 1361	6	10	3500 1588
	139 3531	87 2210	158.5 4026	187.2 4755	66.4 1687	39 991	6	10	3000 1361	3000 1361	6	10	3500 1588
FSV	158.5 4026	73.2 1859	179.7 4564	206.9 5255	52.8 1341	25.2 640	6	5	3000 1361	3000 1361	6	5	3500 1588
	170.5 4331	77.2 1961	191.5 4864	218.7 5555	56.7 1440	29.2 742	6	5	3000 1361	3000 1361	6	5	3500 1588
	189 4801	83.1 2111	209.4 5319	237 6020	62.6 1590	35.1 892	6	5	2950 1338	2			